KROG It's easier with us.

Heavy duty pull-out rack without locking

600 kgs load capacity | approx. 70 % pull-out

Heavy duty pull-out racks are suitable to store heavy goods such as tools, components and many more. The drawers are guided by ball bearings. The rack with steel panels allow direct storage on the shelf. The heavy duty pull-out rack is delivered fully assembled and without a safety lock.



Pull-out rack with 1 extended drawer



Pull-out rack with 5 drawers

Product details

Load capacity	600 kgs (evenly loaded)
Pull-out depth	approx. 70 %
Material	Steel
Empty weight	depends on drawers
Rack width	1,170 mm
Rack depth	1,284 mm
Rack height	2,007 mm
Drawer width	834 mm
Drawer depth	1,225 mm
Configuration	Steel shelf panel Rubber mat on all drawers Handle Raised edge at the back side Crossbars for transport Metal shelf on top
Commodity code	73089098
Unit	1 piece
Already assembled	Yes

Versions

Drawers	Clear height (CH)	CH highest drawer	Weight	Art-No.
2	749 mm	978 mm	252 kgs	220907002
3	449 mm	778 mm	329 kgs	220907003
4	349 mm	578 mm	407 kgs	220907004
5	249 mm	578 mm	485 kgs	220907005


LOAD	PULL-OUT	COLOUR FRAME	COLOUR DRAWER	MAX. QUANTITY/ PALLET
KG	%		RAL	
600	70	Steel	5010	1

VALDEMAR KROG GMBH T + 49 (0) 40 – 8000 775-0 F + 49 (0) 40 – 8000 775-69 INFO@KROG.DE WWW.KROG.DE

Heavy duty pull-out rack without locking

600 kgs load capacity | approx. 70 % pull-out

Engineering drawing

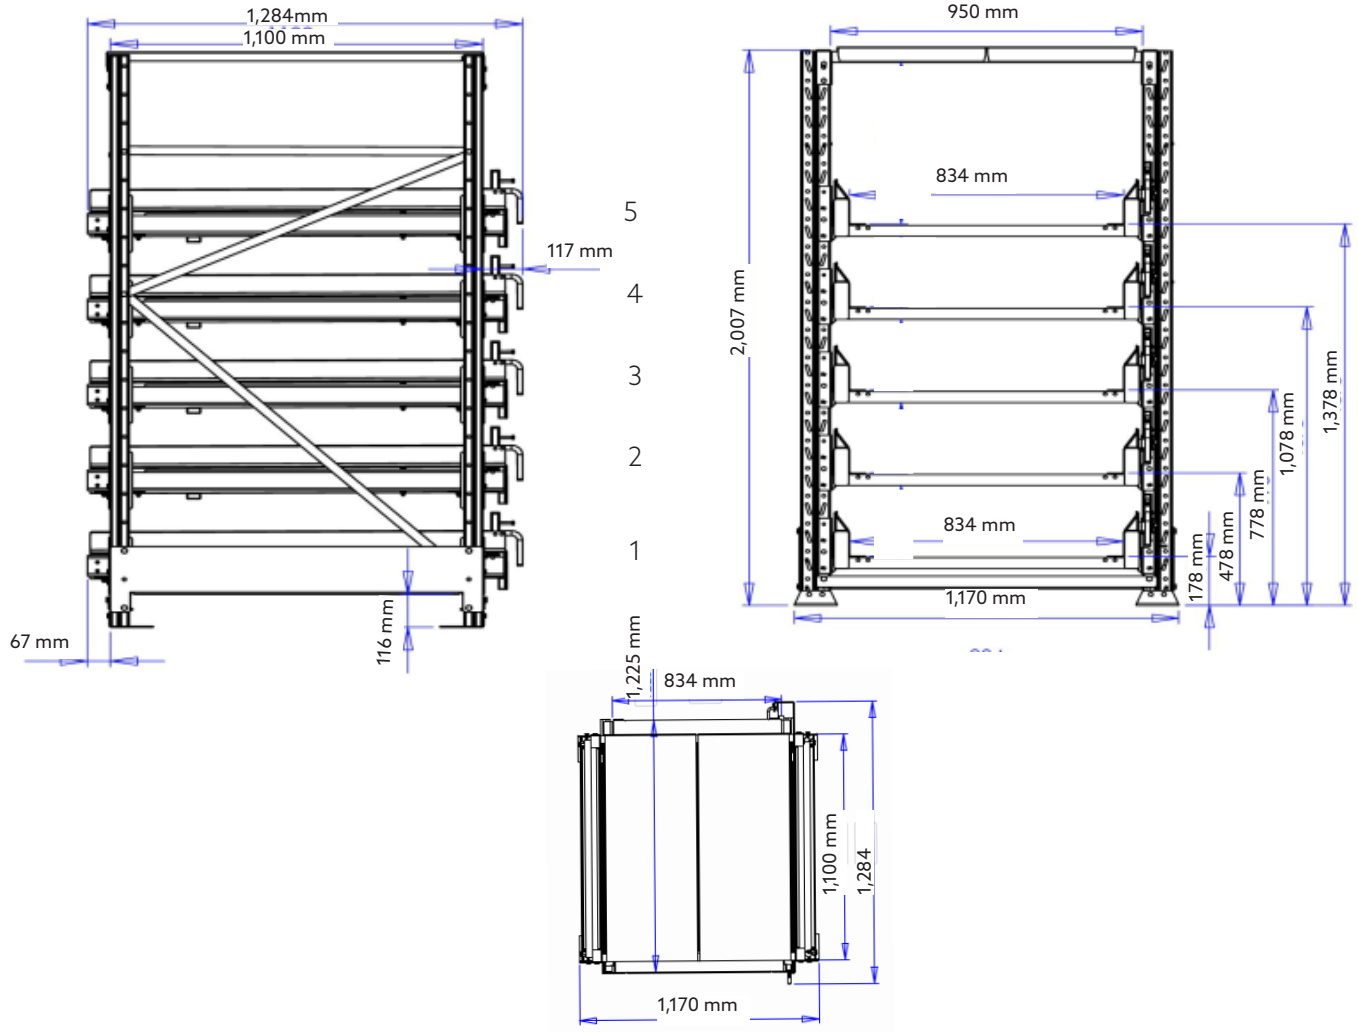

Position height of drawers

Position	2 drawers	3 drawers	4 drawers	5 drawers
1	184 mm	184 mm	184 mm	184 mm
2	984 mm	684 mm	584 mm	484 mm
3	-	1,184 mm	984 mm	784 mm
4	-	-	1,384 mm	1,084 mm
5	-	-	-	1,384 mm

VALDEMAR KROG GMBH T + 49 (0) 40 – 8000 775-0 F + 49 (0) 40 – 8000 775-69 INFO@KROG.DE WWW.KROG.DE

Heavy duty pull-out rack without locking

600 kgs load capacity | approx. 70 % pull-out

Important safety instructions

- Each drawer is labelled with the maximum load capacity (for an evenly distributed load)
- The pull-out rack is equipped with a shelf at the top. This can be used as an additional loading surface. A label with the max. load capacity of the top (for an evenly distributed load) is attached to the shelf
- The rack must always be secured to the floor with at least two floor anchors on all four feet
- The pull-out rack can be picked up and moved from the side with a forklift or hand pallet truck and picked up and moved from the side. The crossbar at the front only serves to stabilise the pull-out rack. It must not be used to lift the rack
- As soon as the rack is anchored in the floor, the front strut can be removed. Without it, the shelf can be moved more easily with an ant or a forklift for loading and unloading.
- When loading the pull-out rack, ensure that the bottom drawer is loaded first
- When unloading the pull-out rack, ensure the top drawer is unloaded first

Data sheet, status 09.2026

Errors and omissions excepted. All values are approximate. Pictures may show accessorie or other products.

VALDEMAR KROG GMBH T + 49 (0) 40 – 8000 775-0 F + 49 (0) 40 – 8000 775-69 INFO@KROG.DE WWW.KROG.DE