

## Compact pull-out rack pull-out 100 %

Compact pull-out racks can be used as retrieval rack or order picking rack directly at the workstation. The drawers with steel panels are ideal for storing small parts or load carriers such as Euro standard containers, Euro boxes or other plastic boxes. Accessories are available separately. The compact pull-out rack is supplied assembled.

### Product details

Load capacity	150 kgs (evenly loaded)
Pull-out depth	100 %
Material	Steel
Empty weight	depends on numbers of drawers
Rack width	880 mm
Rack depth	1,251 mm
Rack height	1,560 mm
Drawer width	800 mm
Drawer depth	1,200 mm
Configuration	Raised edges on all 4 sides Steel shelf panel Safety locking system Black handle

Commodity code	73089098
Unit	1 piece
Already assembled	yes

### Versions

Drawers	Clear height	Clear height highest drawer	Weight	Art-No.
3	366 mm	381 mm	148 kgs	221600-3
4	246 mm	291 mm	185 kgs	221600-4
5	186 mm	201 mm	217 kgs	2216000
6	126 mm	231 mm	251 kgs	221600-6
7	96 mm	201 mm	286 kgs	221600-7


LOAD	PULL-OUT	COLOUR FRAME	COLOUR DRAWERS	MAX. QUANTITY/ PALLET
150	100	5010	7024	1



Empty pull-out rack with extended drawer



Loaded pull-out rack with 5 drawers

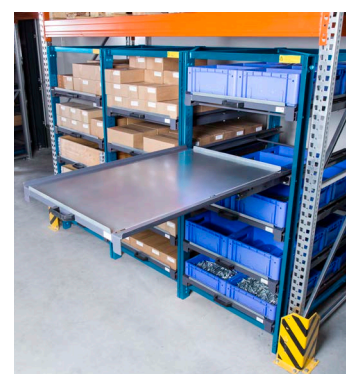


Loaded compact pull-out rack in use

## Compact pull-out rack

### pull-out 100 %

#### Engineer drawers

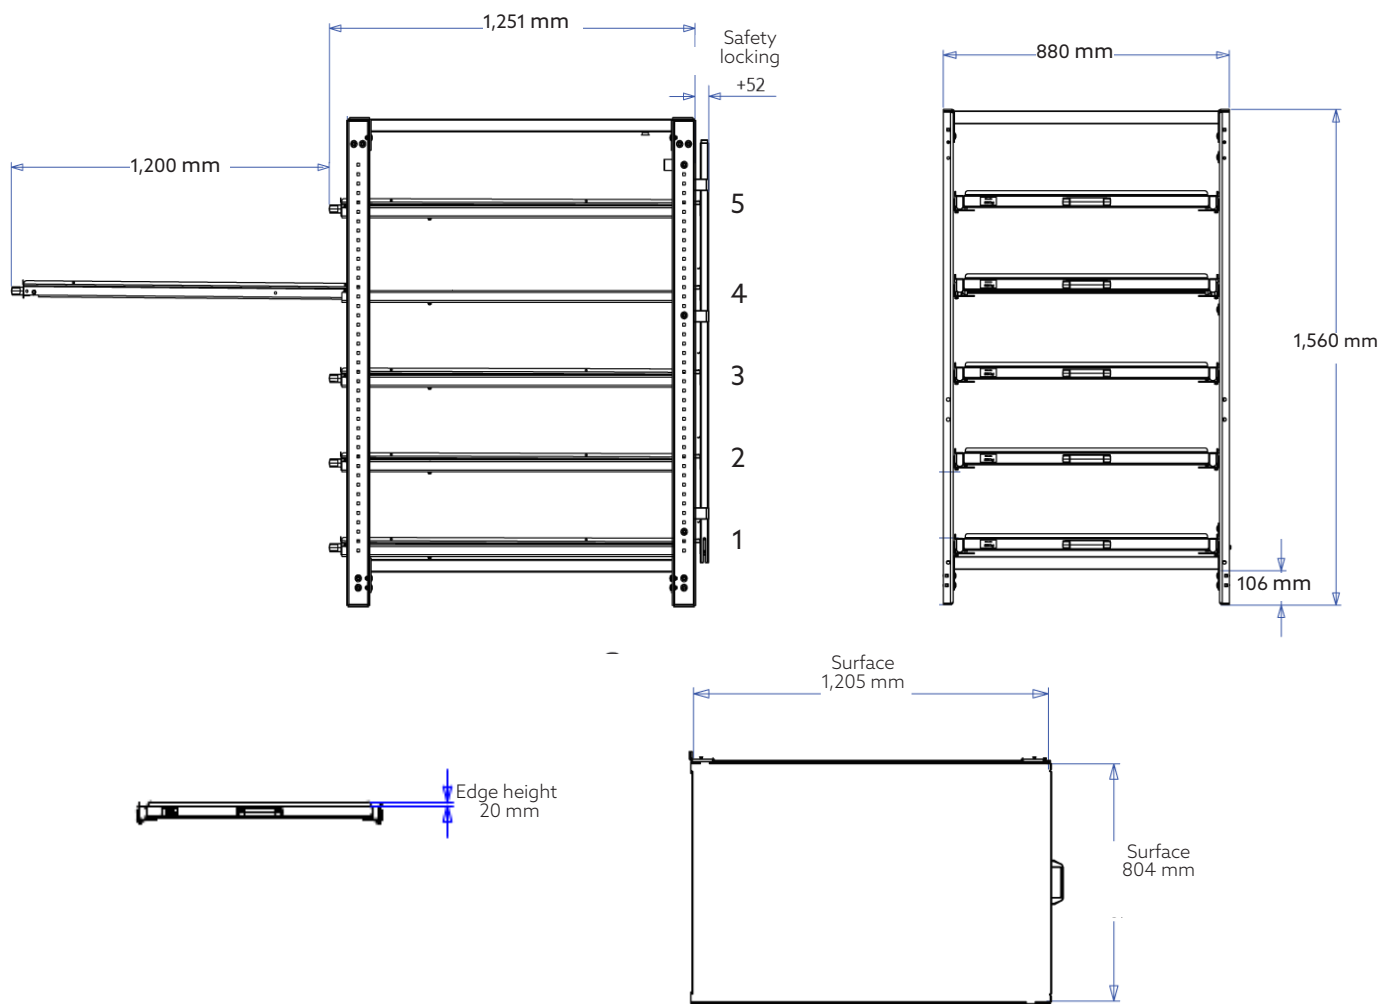

#### Position height of drawers

Position	3 drawers	4 drawers	5 drawers	6 drawers	7 drawers
1	234 mm	234 mm	234 mm	234 mm	234 mm
2	684 mm	564 mm	504 mm	444 mm	414 mm
3	1,134 mm	894 mm	774 mm	654 mm	594 mm
4	-	1,224 mm	1,044 mm	864 mm	774 mm
5	-	-	1,314 mm	1,074 mm	954 mm
6	-	-	-	1,284 mm	1,134 mm
7	-	-	-	-	1,314 mm

# Compact pull-out rack pull-out 100 %

## Important safety instructions

- Each drawer ist labelled with the maximum load capacity (for an evenly distributed load)
- If the compact pull-out rack is equipped with an optional table top or pallet holders on the top, it can be used as an additional loading surface. A label with the max. load capacity of the top (for an evenly distributed load) is attached to the shelf or the bracket
- When loading the pull-out rack, ensure that the bottom drawer is loaded first
- When unloading the compact pull-out rack, ensure the top drawer is unloaded first
- Compact pull-out racks that are not equipped with a safety locking must be secured to the floor with anchors on all 4 feet

*Data sheet, status 03.2025*

*Errors and omissions excepted. All values are approximate.*

*Pictures may show accessorie or other products.*