

## Compact pull-out rack approx. 70% pull-out two-way

Compact pull-out racks can be used as retrieval rack or order picking rack directly at the workstation. The drawers with steel panels are ideal for storing small parts or load carriers such as Euro standard containers, Euro boxes or other plastic boxes. Accessories are available separately. The compact pull-out rack is supplied assembled.

### Product details

Load capacity	200 kgs (evenly loaded)
Pull-out depth	approx. 70 % in both ways
Material	Steel
Empty weight	depends on numbers of drawers
Rack width	880 mm
Rack depth	1,314 mm
Rack height	1,560 mm
Drawer width	800 mm
Drawer depth	1,200 mm
Configuration	Raised edges on all 4 sides Steel shelf panel 2 black handles

Commodity code	73089098
Unit	1 piece
Already assembled	yes

### Versions


Drawers	Clear height	Clear height highest drawer	Weight	Art-No.
3	402 mm	403 mm	139 kgs	221700-3
4	282 mm	313 mm	171 kgs	221700-4
5	222 mm	223 mm	204 kgs	221700-5
6	162 mm	253 mm	236 kgs	221700-6
7	132 mm	223 mm	269 kgs	221700-7



Empty pull-out rack with 2 extended drawers



Pull-out rack with 3 drawers, 2 of them extended

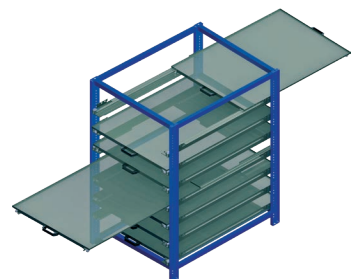


Pull-out rack with 7 drawers, 2 of them extended

LOAD KG	PULL-OUT %	COLOUR FRAME RAL	COLOUR DRAWERS RAL	MAX. QUANTITY/ PALLET
200	70	5010	7024	1

## Compact pull-out rack

approx. 70% pull-out two-way

Engineering drawing

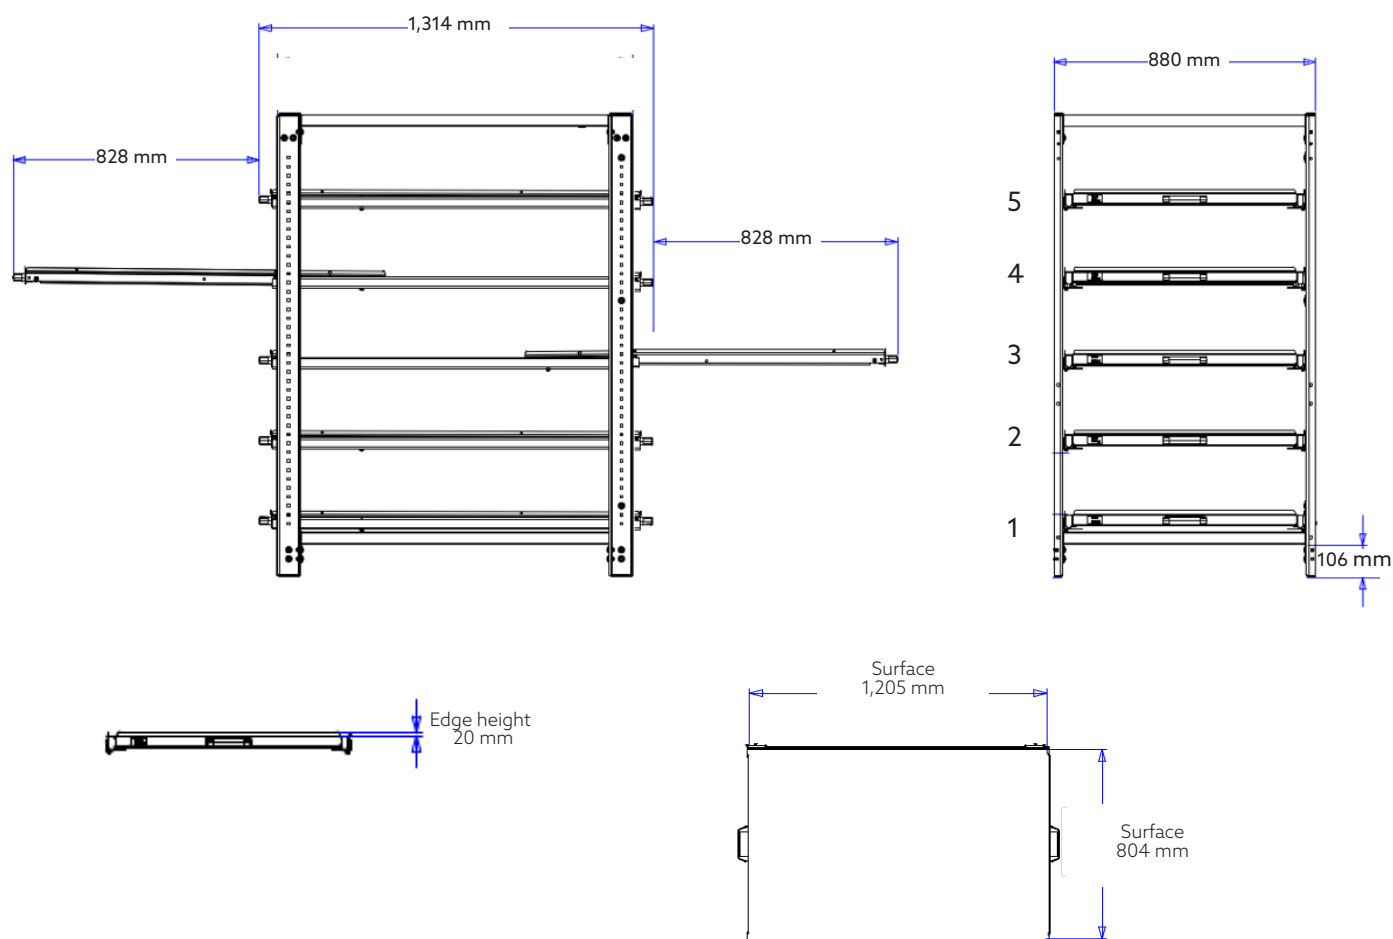

## Position height of drawers

Position	3 drawers	4 drawers	5 drawers	6 drawers	7 drawers
1	208 mm	208 mm	208 mm	208 mm	208 mm
2	658 mm	539 mm	478 mm	418 mm	388 mm
3	1,108 mm	869 mm	748 mm	628 mm	568 mm
4	-	1,199 mm	1,018 mm	838 mm	748 mm
5	-	-	1,288 mm	1,048 mm	928 mm
6	-	-	-	1,258 mm	1,108 mm
7	-	-	-	-	1,288 mm

# Compact pull-out rack

## approx. 70% pull-out two-way

### Important safety instructions

- Each drawer ist labelled with the maximum load capacity (for an evenly distributed load)
- If the compact pull-out rack is equipped with an optional table top or pallet holders on the top, it can be used as an additional loading surface. A label with the max. load capacity of the top (for an evenly distributed load) is attached to the shelf or the bracket
- When loading the pull-out rack, ensure that the bottom drawer is loaded first
- When unloading the compact pull-out rack, ensure the top drawer is unloaded first
- Compact pull-out racks that are not equipped with a safety locking must be secured to the floor with anchors on all 4 feet

*Data sheet, status 03.2025*

*Errors and omissions excepted. All values are approximate.*

*Pictures may show accessorie or other products.*