

Heavy duty pull-out rack

600 kgs load capacity | 100% pull-out

Heavy duty pull-out racks are suitable to store heavy goods such as tools, components and many more. The drawers with steel panels allow direct storage on the shelf. The heavy duty pull-out rack is supplied assembled.

Product details

Load capacity	600 kgs (evenly loaded)
Pull-out depth	100 %
Material	Steel
Empty weight	depends on numbers of drawers
Rack width	1,170 mm
Rack depth	1,341 mm
Rack height	2,007 mm
Drawer width	834 mm
Drawer depth	1,226 mm
Configuration	Steel shelf panel Metal stop at the back Safety locking system Handle Rubber mat on each shelf Metal shelf on top Crossbars for transport

Commodity code	73089098
Packaging unit	1 piece
Already assembled	Yes

Versions

Drawers	Clear height	Clear height highest drawer	Weight	Art-No.
2	723 mm	897 mm	280 kgs	221901002
3	423 mm	697 mm	376 kgs	221901003
4	323 mm	497 mm	472 kgs	221901004
5	223 mm	497 mm	588 kgs	221901005



Heavy duty pull-out rack with 1 extended drawer




Empty heavy duty pull-out rack with 5 drawers

LOAD KG	PULL-OUT %	COLOUR FRAME	COLOUR DRAWER	MAX. QUANTITY/ PALLET
600	100	Steel	7024	1

Heavy duty pull-out rack

600 kgs load capacity | 100% pull-out

Engineering drawing

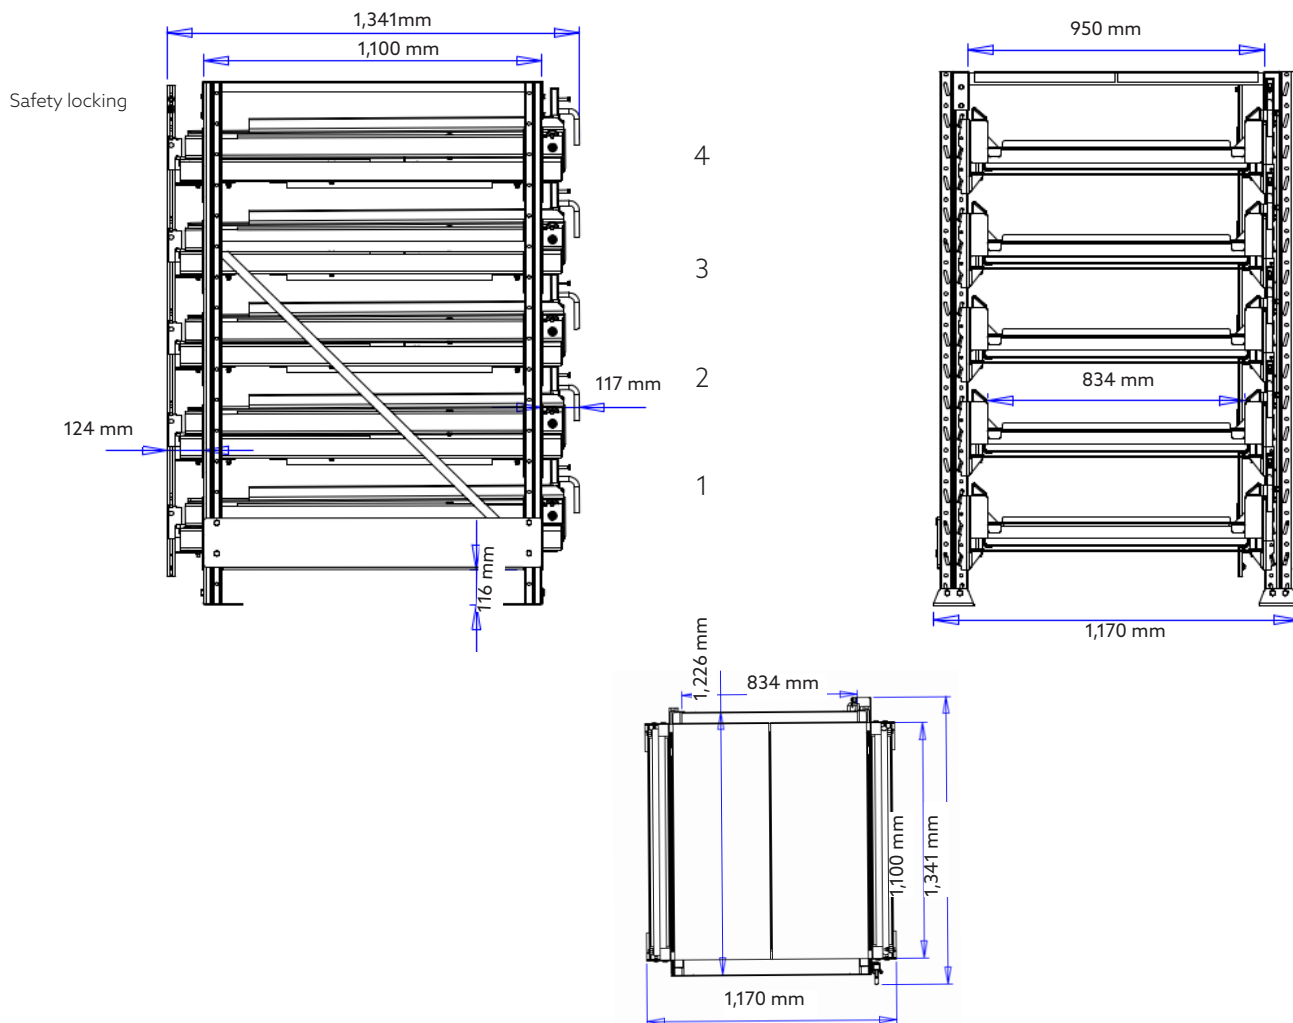

Position height of drawers

Position	2 drawers	3 drawers	4 drawers	5 drawers
1	265 mm	265 mm	265 mm	265 mm
2	1,065 mm	765 mm	665 mm	565 mm
3	-	1,265 mm	1,065 mm	865 mm
4	-	-	1,465 mm	1,165 mm
5	-	-	-	1465 mm

Heavy duty pull-out rack

600 kgs load capacity | 100% pull-out

Important safety instructions

- Each drawer is labelled with the maximum load capacity (for an evenly distributed load)
- The heavy duty pull-out rack is equipped with a metal shelf at the top. This can be used as an additional loading surface. A label with the max. load capacity of the top (for an evenly distributed load) is attached to the shelf
- The rack must always be secured to the floor with at least two floor anchors on all four feet
- The pull-out rack can be picked up and moved from the side with a forklift or hand pallet truck and picked up and moved from the side. The crossbar at the front only serves to stabilise the pull-out rack. It must not be used to lift the heavy duty pull-out rack
- As soon as the heavy-duty pull-out rack is anchored in the floor, the front strut can be removed. Without it, the shelf can be moved more easily with a crane or a forklift for loading and unloading.
- When loading the pull-out rack, ensure that the bottom drawer is loaded first
- When unloading the pull-out rack, ensure the top drawer is unloaded first

Data sheet, status 05.2025

Errors and omissions excepted. All values are approximate.

Pictures may show accessories or other products.

Page 3/3