

Heavy duty pull-out rack

600 kgs load capacity approx. | 70 % pull-out

Heavy duty pull-out racks are suitable to store heavy goods such as tools, components and many more. The drawers with steel panels allow direct storage on the shelf. The heavy duty pull-out rack is supplied assembled.

Product details

Load capacity	600 kgs (evenly loaded)
Pull-out depth	approx. 70 %
Material	Steel
Empty weight	depends on drawers
Rack width	1,170 mm
Rack depth	1,342 mm
Rack height	2,007 mm
Drawer width	834 mm
Drawer depth	1,225 mm
Configuration	Steel plate Metal stop at the back Safety locking system Handle Rubber mat on each shelf Metal shelf on top Crossbars for transport

Commodity code	73089098
Unit	1 piece
Already assembled	Yes

Versions

Drawers	Clear height (CH)	CH highest drawer	Weight	Art-No.
2	749 mm	978 mm	237 kgs	221907002
3	449 mm	778 mm	310 kgs	221907003
4	349 mm	578 mm	410 kgs	221907004
5	249 mm	578 mm	458 kgs	221907005



Pull-out rack with 1 extended drawer




Pull-out rack with 5 drawers

LOAD KG	PULL-OUT %	COLOUR FRAME	COLOUR DRAWER	MAX. QUANTITY/ PALLET
600	70	Steel	7024	1

Heavy duty pull-out rack

600 kgs load capacity approx. | 70 % pull-out
Engineering drawing

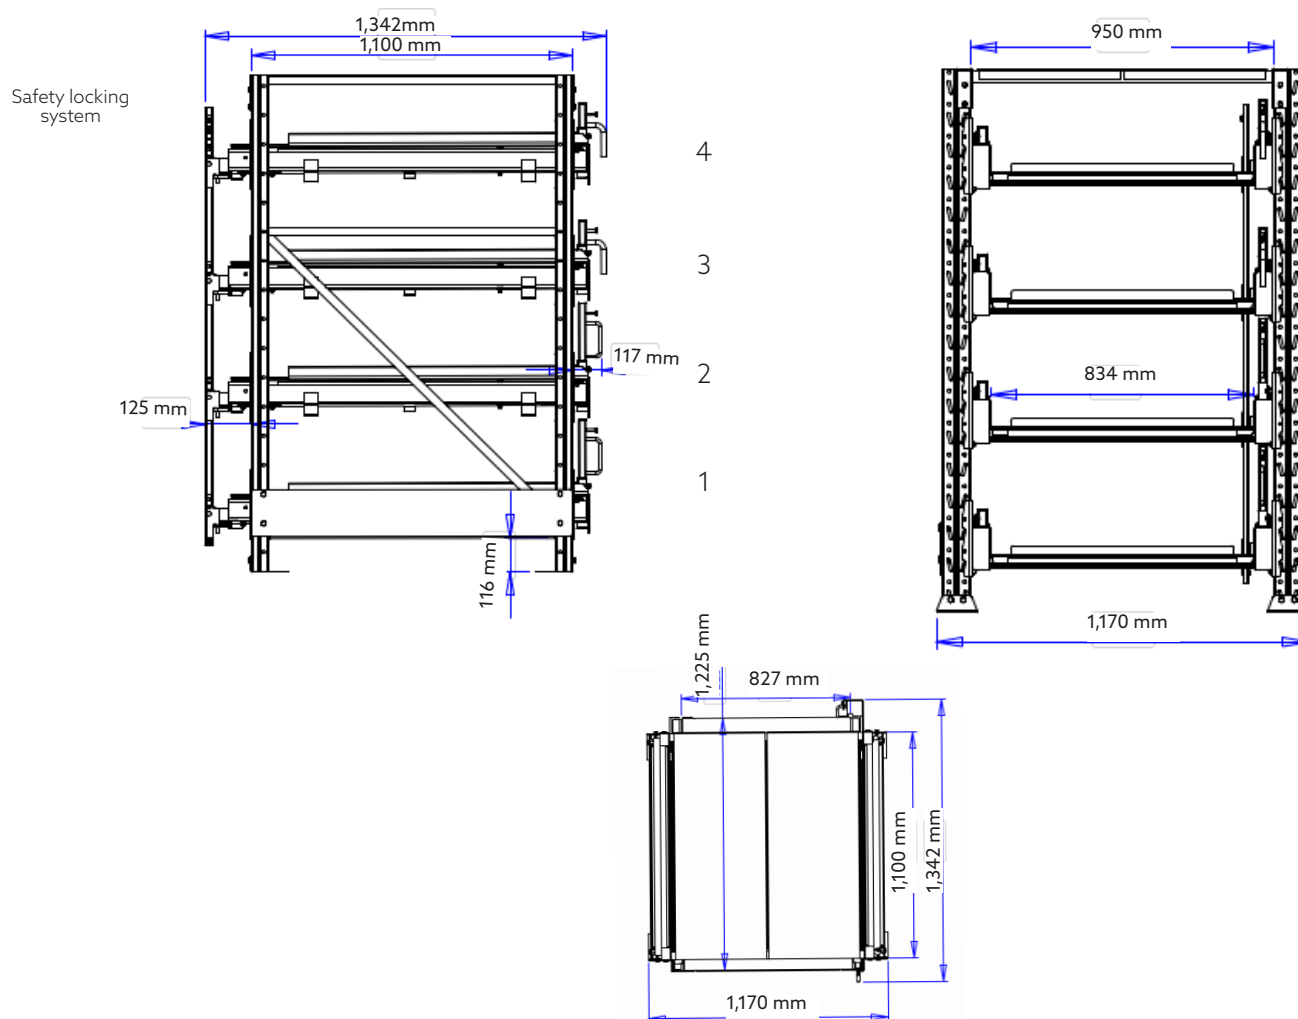

Position height of drawers

Position	2 drawers	3 drawers	4 drawers	5 drawers
1	184 mm	184 mm	184 mm	184 mm
2	984 mm	684 mm	584 mm	484 mm
3	-	1,184 mm	984 mm	784 mm
4	-	-	1,384 mm	1,084 mm
5	-	-	-	1,384 mm

Heavy duty pull-out rack

600 kgs load capacity approx. | 70 % pull-out

Safety instructions

- Each drawer is labelled with the maximum load capacity (for an evenly distributed load)
- The heavy duty pull-out rack is equipped with a shelf at the top. This can be used as an additional loading surface. A label with the max. load capacity of the top (for an evenly distributed load) is attached to the shelf
- The rack must always be secured to the floor with at least two floor anchors on all four feet
- The pull-out rack can be picked up and moved from the side with a forklift or hand pallet truck and picked up and moved from the side. The crossbar at the front only serves to stabilise the pull-out rack. It must not be used to lift the heavy duty pull-out rack
- As soon as the heavy-duty pull-out rack is anchored in the floor, the front strut can be removed. Without it, the shelf can be moved more easily with an ant or a forklift for loading and unloading.
- When loading the pull-out rack, ensure that the bottom drawer is loaded first
- When unloading the compact pull-out rack, ensure the top drawer is unloaded first

*Data sheet, status 05.2025
Errors and omissions excepted. All values are approximate. Pictures
may show accessorie or other products.*

Seite 3/3