

Heavy duty pull-out unit for beams

1,000kgs load capacity | 100% pull-out

Pull-out units can be integrated into existing pallet racks. They are placed on the cross beams and bolted in the rear area. Loading can be done from the forklift corridor as well as from the picking corridor. The pull-out unit is delivered fully assembled. A fastening set is included in the scope of delivery.


Product details

| | |
|-------------------------|--|
| Load capacity | 1,000 kgs (evenly loaded) |
| Pull-out depth | 100 % |
| Material | Steel |
| Empty weight | 98 kgs |
| Suitable for rack depth | 970 - 1,220 mm |
| Configuration | Raised edges on the left and right side Anti-slipping stripes Metal stop at the back, bolted |
| Commodity code | 73089098 |
| Unit | 1 piece |
| Max. quantity / pallet | 5 pieces |


Versions

| Dimension (WxDxH) | Handle | Handling | Colour | Art-No. |
|--|--------|------------|-------------|----------|
| 880 x 1,260 x 202 mm 884 x 1,260 x 202 mm | A B | Short side | RAL 5010 | 10105010 |
| 880 x 1,260 x 202 mm 884 x 1,260 x 202 mm | A B | Short side | RAL 7024 | 10107024 |

Handle: A = Standard handle, 200 mm hight B = Easy Action Handle, 330 mm hight

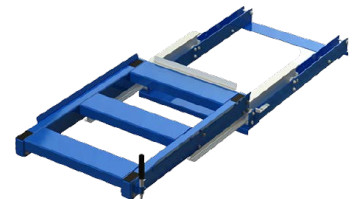

Full extended pull-out unit with standard handle



Closed pull-out unit with Easy-Action-Handle




Built-in pull-out unit

| LOAD | PULL-OUT | COLOUR | COLOUR | MAX. QUANTITY/ PALLET |
|-------|----------|--------|--------|--------------------------|
| | | | | |
| 1,000 | 100 | 5010 | 7024 | 5 |

Heavy duty pull-out unit for beams 1,000kgs load capacity | 100% pull-out

Engineering drawing

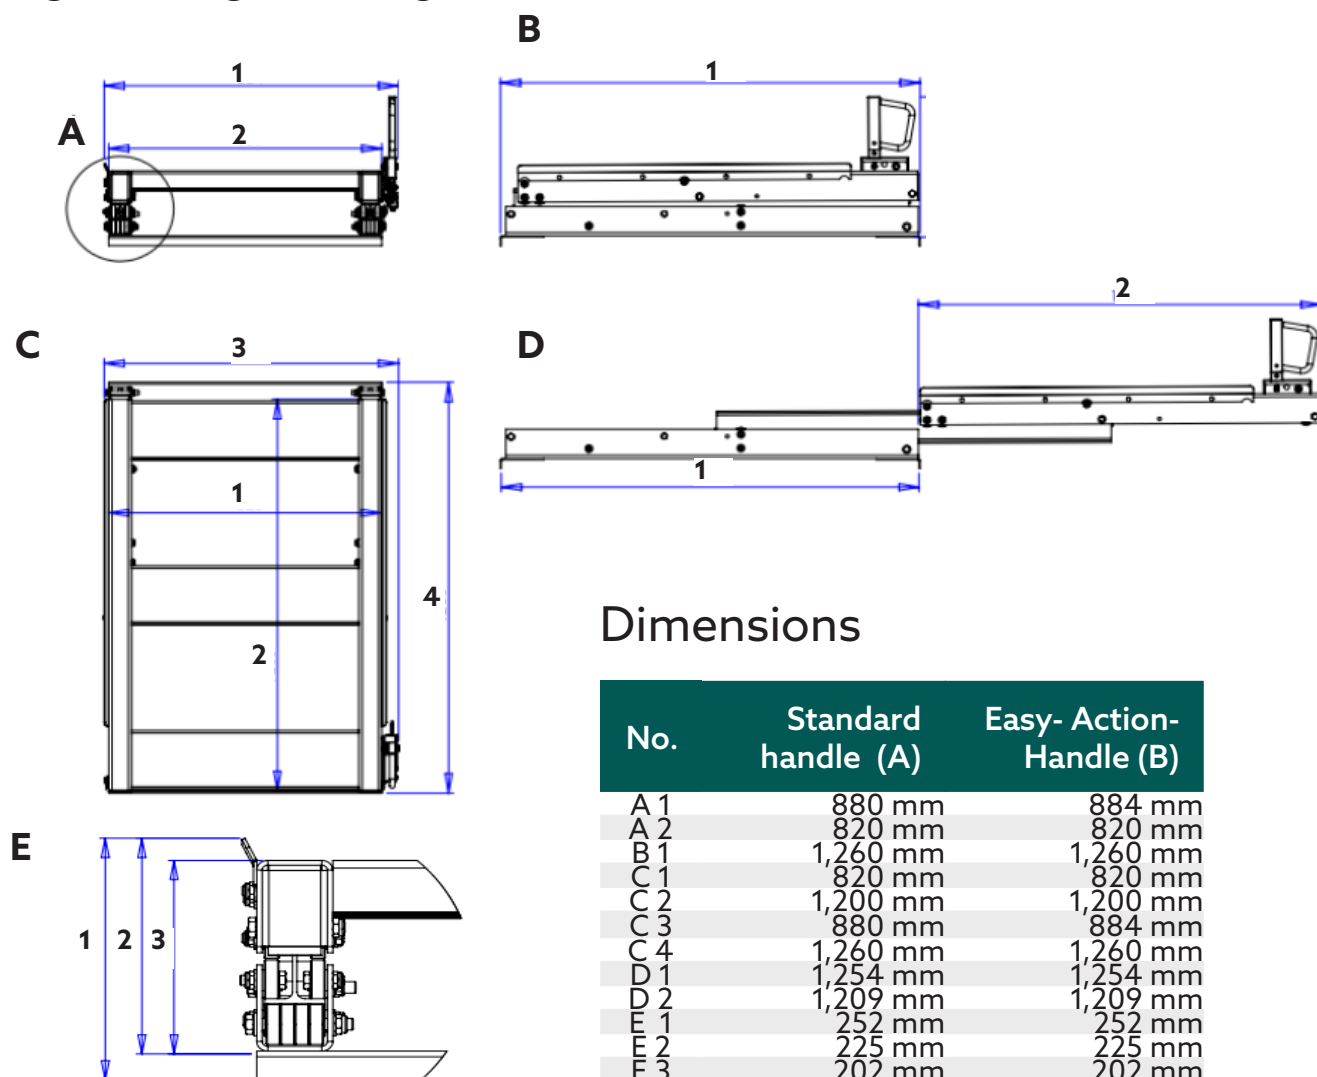

Dimensions

| No. | Standard handle (A) | Easy- Action- Handle (B) |
|-----|---------------------|--------------------------|
| A 1 | 880 mm | 884 mm |
| A 2 | 820 mm | 820 mm |
| B 1 | 1,260 mm | 1,260 mm |
| C 1 | 820 mm | 820 mm |
| C 2 | 1,200 mm | 1,200 mm |
| C 3 | 880 mm | 884 mm |
| C 4 | 1,260 mm | 1,260 mm |
| D 1 | 1,254 mm | 1,254 mm |
| D 2 | 1,209 mm | 1,209 mm |
| E 1 | 252 mm | 252 mm |
| E 2 | 225 mm | 225 mm |
| E 3 | 202 mm | 202 mm |

Mounting kit

| Screws | Beams |
|-----------|--|
| M10 x 140 | For beam height up to 115 mm |
| | Screws for other beam heights on request |

Heavy duty pull-out unit for beams

1,000kgs load capacity | 100% pull-out

Important safety instructions

- The pallet rack must be securely anchored to the floor. Please follow the assembly and safety instructions of the rack manufacturer
- Beams must be firmly screwed to the support uprights (at least M8 screws)
- Pull-out units must be fixed using the bolts, nuts, washers and counterplates supplied according to the assembly instructions
- Depending on the different pull-out units and the length of the beams, the rack must have a minimum shelf load according to the table below
- Maximal load capacity of pull-out unit with evenly distributed load as well as safety instructions are attached to the units
- If there are several pull-out units on one beam, only one unit is allowed to be pulled-out at a time
- If there are several levels with pull-out units, only one unit may be extended at a time
- Immediately after using the pull-out unit, it must be pushed back again and it must be ensured that it is locked in place

Necessary shelf load of the beams

| L = 950 mm 1 pull-out unit | L = 1,850 mm 2 pull-out units next to each other | L = 2,700 mm 3 pull-out units next to each other |
|---|---|---|
| 3,098 kgs | 4,196 kgs | 5,294 kgs |

Data sheet, status 01.2025

Errors and omissions excepted. All values are approximate.

Pictures may show accessories or other products.