KROG It's easier with us.

Pallet pull-out rack without locking

600 kgs load capacity | 100 % pull-out

Pallet pull-out racks are suitable to store heavy goods such as tools, components and many more. The drawers are guided by ball bearings. The rack with steel panels allow direct storage on the shelf. The pallet pull-out rack is delivered fully assembled and without a safety lock.



Pull-out rack with 5 drawers



Empty pull-out rack with 1 extended drawer

Product details

Load capacity	600 kgs (evenly loaded)
Pull-out depth	100 %
Material	Steel
Empty weight	depends on drawers
Rack width	1,100 mm
Rack depth	1,300 mm
Rack height	2,007 mm
Drawer width	834 mm
Drawer depth	1,225 mm
Configuration	Handle Metal shelf on top Crossbars for transport

Commodity code	73089098
Unit	1 piece
Already assembled	Yes

Versions

Drawers	Clear height (CH)	CH highest drawer	Weight	Art-No.
2	729 mm	904 mm	254 kg	220801002
3	429 mm	704 mm	333 kg	220801003
4	329 mm	504 mm	411 kg	220801004
5	229 mm	504 mm	490 kg	220801005


LOAD	PULL-OUT	COLOUR FRAME	COLOUR DRAWER	MAX. QUANTITY/ PALLET
600	100	Stahl	5010	1


VALDEMAR KROG GMBH T + 49 (0) 40 – 8000 775-0 F + 49 (0) 40 – 8000 775-69 INFO@KROG.DE WWW.KROG.DE


Pallet pull-out rack without locking

600 kgs load capacity | 100 % pull-out

Engineering drawing

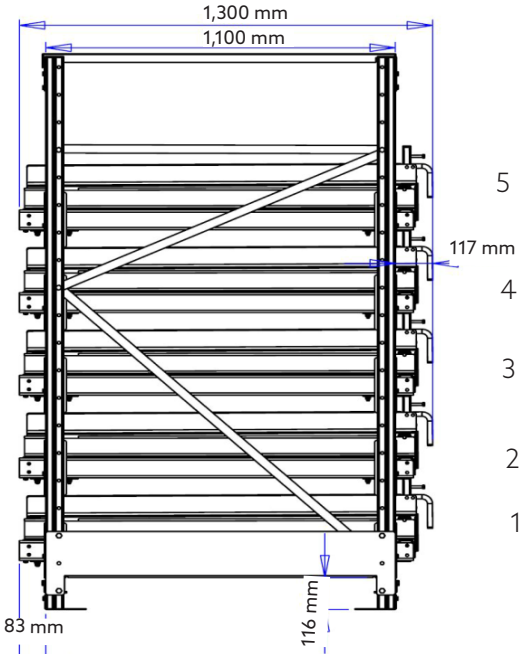

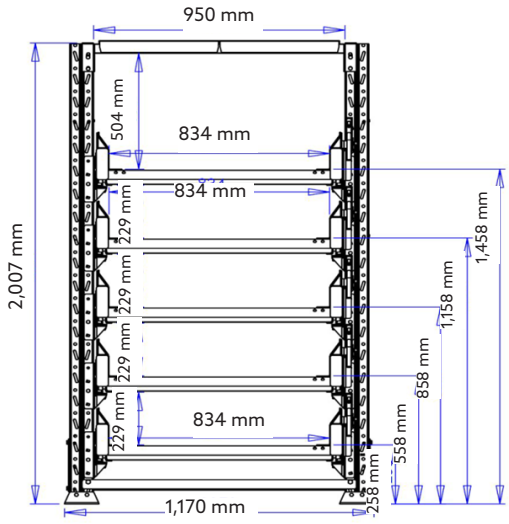



Position height of drawers

Position	2 drawers	3 drawers	4 drawers	5 drawers
1	258 mm	258 mm	258 mm	258 mm
2	1,058 mm	758 mm	658 mm	558 mm
3	-	1,258 mm	1,058 mm	858 mm
4	-	-	1,458 mm	1,158 mm
5	-	-	-	1,458 mm

Data sheet, status 09.2026

Errors and omissions excepted. All values are approximate. Pictures may show accessorie or other products.

VALDEMAR KROG GMBH T + 49 (0) 40 – 8000 775-0 F + 49 (0) 40 – 8000 775-69 INFO@KROG.DE WWW.KROG.DE

Pallet pull-out rack without locking

600 kgs load capacity | 100 % pull-out

Important safety instructions

- Each drawer is labelled with the maximum load capacity (for an evenly distributed load)
- The pull-out rack is equipped with a shelf at the top. This can be used as an additional loading surface. A label with the max. load capacity of the top (for an evenly distributed load) is attached to the shelf
- The rack must always be secured to the floor with at least two floor anchors on all four feet
- The pull-out rack can be picked up and moved from the side with a forklift or hand pallet truck and picked up and moved from the side. The crossbar at the front only serves to stabilise the pull-out rack. It must not be used to lift the rack
- As soon as the rack is anchored in the floor, the front strut can be removed. Without it, the shelf can be moved more easily with an ant or a forklift for loading and unloading.
- When loading the pull-out rack, ensure that the bottom drawer is loaded first
- When unloading the pull-out rack, ensure the top drawer is unloaded first

VALDEMAR KROG GMBH T + 49 (0) 40 – 8000 775-0 F + 49 (0) 40 – 8000 775-69 INFO@KROG.DE WWW.KROG.DE