

Pull-out unit for beams

200 kgs load capacity|70 % pull-out two-way

Pull-out units can be integrated into existing pallet racks. They are placed on the cross beams and bolted in the rear area. Loading can be done from the forklift corridor as well as from the picking corridor. The unit runs on ball bearings. The pull-out unit is delivered fully assembled. A fastening set is included in the scope of delivery.

Product details

Load capacity	200 kgs (evenly loaded)
Pull-out depth	70 % in two ways
Material	Steel
Empty weight	38 kgs
Suitable for rack depth	980 - 1,150 mm
Configuration	Steel shelf panel Raised edges on all 4 sides Black handle

Commodity code	73089098
Unit	1 piece
Max. quantity / pallet	12 pieces

Versions

Dimension (WxDxH)	Handling	Colour	Art-No.
855 x 1,286 x 52 mm	Short side	RAL 5010	22005010
855 x 1,286 x 52 mm	Short side	RAL 7024	22007024



Extended pull-out unit



Closed pull-out unit




Built-in pull-out unit, pulled out for forklift corridor

LOAD	PULL-OUT	COLOUR	COLOUR	MAX. QUANTITY/ PALLET
200	70	5010	7024	12

Pull-out unit for beams

200 kgs load capacity | 70 % pull-out two-way

Engineering drawing

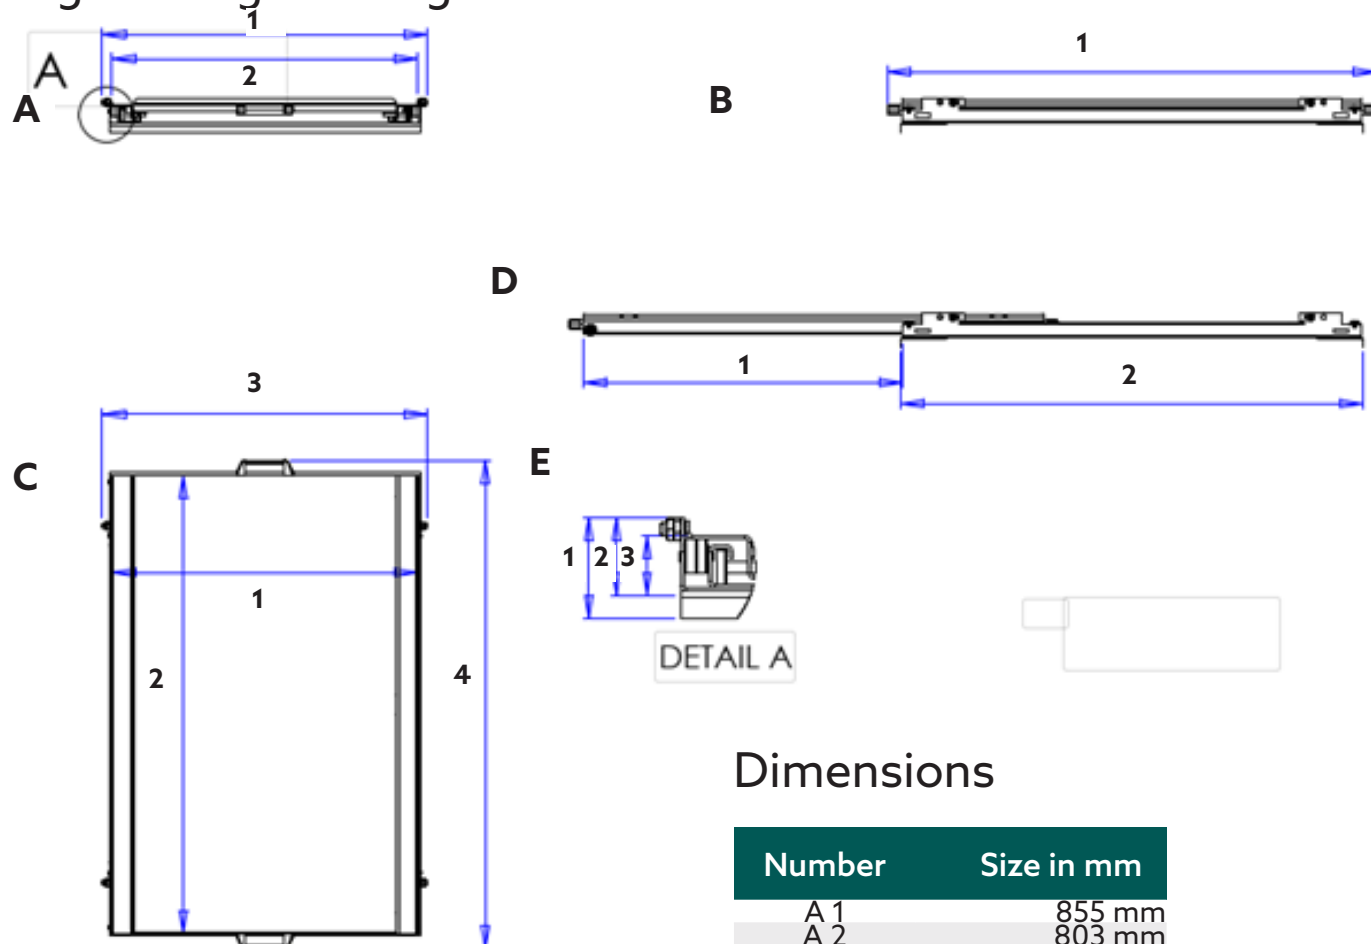

Dimensions

Number	Size in mm
A 1	855 mm
A 2	803 mm
B 1	1,286 mm
C 1	803 mm
C 2	1,206 mm
C 3	855 mm
C 4	1,286 mm
D 1	838 mm
D 2	1,213 mm
E 1	88 mm
E 2	68 mm
E 3	52 mm

Mounting kit

Screws	Beams
M8 x 140	For beam height up to 115 mm
	Screws for other beam height on request!

Pull-out unit for beams

200 kgs load capacity|70 % pull-out two-way

Important safety instructions

- The pallet rack must be securely anchored to the floor. Please follow the assembly and safety instructions of the rack manufacturer
- Beams must be firmly screwed to the support uprights (at least M8 screws)
- Pull-out units must be fixed using the bolts, nuts, washers and counterplates supplied according to the assembly instructions
- Depending on the different pull-out units and the length of the beams, the rack must have a minimum shelf load according to the table below
- Maximal load capacity of pull-out unit with evenly distributed load as well as safety instructions are attached to the units
- If there are several pull-out units on one beam, only one unit is allowed to be pulled-out at a time
- If there are several levels with pull-out units, only one unit may be extended at a time
- Immediately after using the pull-out unit, it must be pushed back again and it must be ensured that it is locked in place

Necessary shelf load of the beams

L = 950 mm 1 pull-out unit	L = 1,850 mm 2 pull-out units next to each other	L = 2,700 mm 3 pull-out units next to each other
510 kgs	737 kgs	964 kgs

Data sheet, status 06.2025

Errors and omissions excepted. All values are approximate.

Pictures may show accessories or other products.