

XL pull-out unit for 1,800 mm beams

400 kgs load capacity| 100 % pull-out

XL pull-out units can be integrated into existing pallet racks. They are placed on the cross beams and bolted in the rear area. Loading can be done from the forklift corridor as well as from the picking corridor. The unit runs on ball bearings. The pull-out unit is delivered unasssembled. A fastening set is included in the scope of delivery.

Product details

Load capacity	400 kgs (evenly loaded)
Pull-out depth	100 %
Material	Steel
Empty weight	74 kgs
Suitable for rack depth	970 - 1,170 mm
Configuration	2 handles

Commodity code	73089098
Packaging unit	1 piece
Max. Quantity / pallet	5 pieces

Version

Dimension (WxDxH)	Colour	Art-No.
1,720 x 1,273 x 74 mm	RAL 5010	44101700
1,720 x 1,273 x 74 mm	RAL 7024	44101700

Please specify a colour when ordering.



Fully extended pull-out unit



Closed pull-out unit



400

PULL-OUT



100

COLOUR



5010

COLOUR



7024

MAX. QUANTITY/
PALLET




5

XL pull-out unit for 1,800 mm beams

400 kgs load capacity| 100 % pull-out

Engineering drawing

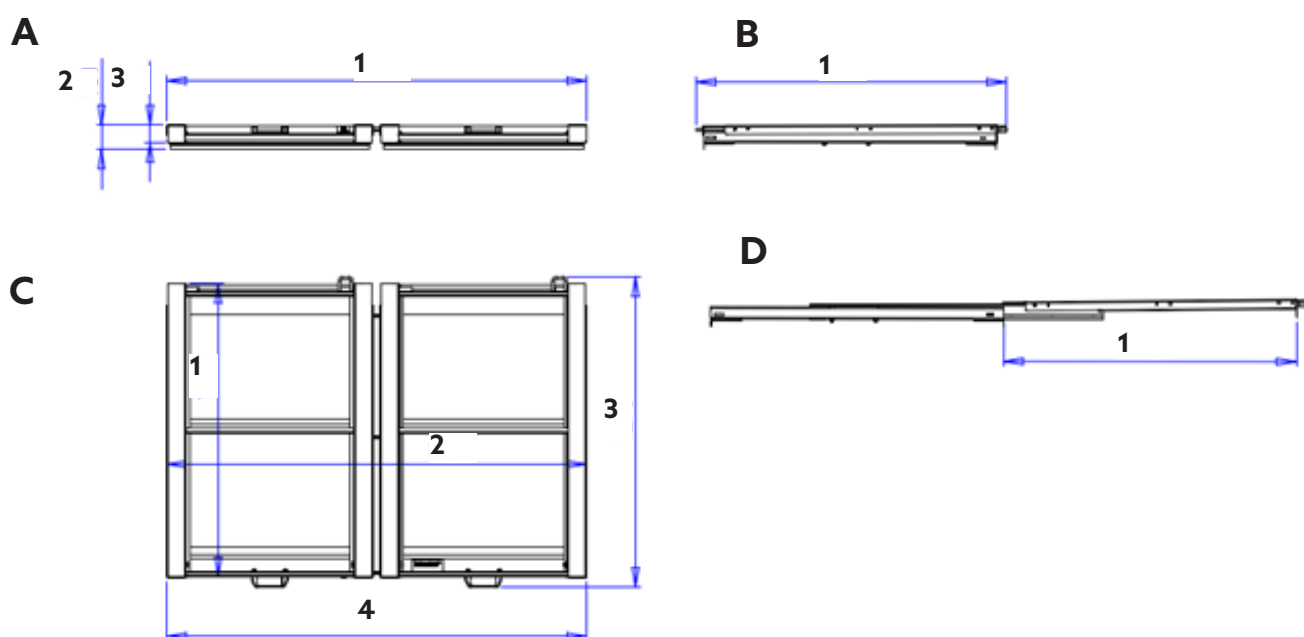

Dimensions

Number	Size (in mm)
A 1	1,720 mm
A 2	101 mm
A 3	74 mm
B 1	1,273 mm
C 1	1,200 mm
C 2	1,720 mm
C 3	1,273 mm
C 4	1,720 mm
D 1	1,198 mm

Mounting kit

Screws	Beams
M8 x 140	For beam height up to 115 mm
Screws for other beam heights on request!	

XL pull-out unit for 1,800 mm beams

400 kgs load capacity| 100 % pull-out

Important safety instructions

- The pallet rack must be securely anchored to the floor. Please follow the assembly and safety instructions of the rack manufacturer
- Beams must be firmly bolted to the support uprights (using at least M8 bolts)
- Pull-out units must be fixed using the bolts, nuts, washers and counterplates supplied according to the assembly instructions
- Depending on the different pull-out units and the length of the beams, the rack must have a minimum shelf load according to the table below
- The maximum load capacity of the pull-out units with an evenly distributed load and safety instructions are attached to the pull-out units
- If there are several pull-out units on one beam, only one unit is allowed to be pulled-out at a time
- If there are several levels with pull-out units, only one unit may be extended at a time
- Immediately after using the pull-out unit, it must be pushed back again and it must be ensured that it is locked in place

Necessary shelf load of the beams

L = 1,800 mm 1 pull-out unit
1,384 kgs

Data sheet, status 03.2025
Errors and omissions excepted. All values are approximate. Pictures
may show accessories or other products.